


lamaPLC: HT16K33 display controller

The **HT16K33** is a memory-mapped, multi-function LED controller driver. The device supports a maximum of 128 display segments (16 segments and 8 commons) and a 13×3 Maximum matrix key scan circuit. The software-configurable features of the HT16K33 make it suitable for a wide range of LED applications, including LED modules and display subsystems. The HT16K33 is compatible with most microcontrollers and communicates via a two-line bidirectional I²C bus.



HT16K33 IC Feature

- Operating voltage: **4.5V-5.5V**
- Integrated RC oscillator
- I²C-bus interface
- 16×8-bit RAM for display data storage
- Max. 16×8 patterns, 16 segments, and eight commons
- R/W address auto-increment
- Max. 13×3 matrix key scanning
- 16-step dimming circuit
- Supports 20/24/28-pin SOP package types

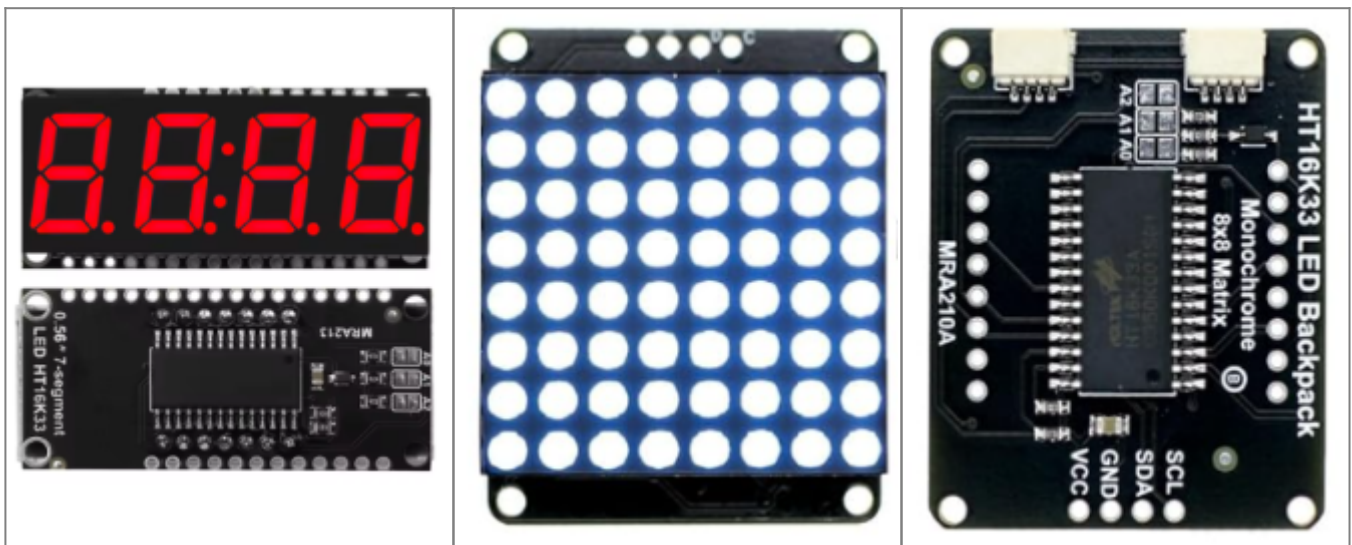

I²C addressing

The base I²C address for an HT16K33 is **0x70**, but it can be changed to one of seven other addresses by setting the four address pins (**A0-A3**) via hardware. Each HT16K33 chip can have a unique address from **0x70** to **0x77**. If multiple HT16K33 devices are used on the same bus, each must have a distinct address, and if you use more than one, their addresses must be sequential, such as **0x70**, **0x71**, **0x72**.



If you'd like to support the development of the site with the price of a


coffee — or a few — [please do so here.](#)

Here's a handy tip: you can quickly save this page as a PDF by clicking "export to PDF" in the menu on the right side of the screen.

2026/02/14 23:38

Schema

12*8 display application: (No INT pin function and 10*3 key function):

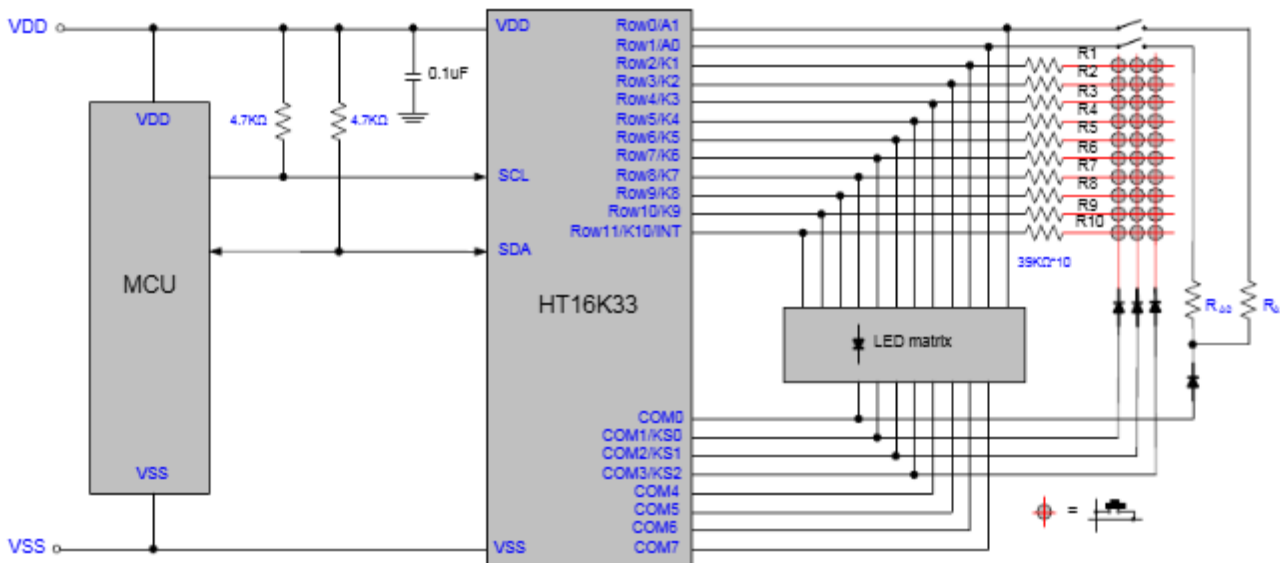

Arduino Wiring Diagram

The HT16K33 uses standard I²C pins. Connect your display as follows:

HT16K33 Pin	Arduino Uno Pin	Arduino Mega Pin	Description
VCC	5V	5V	Power (4.5V-5.5V)
GND	GND	GND	Ground
SDA	A4	20	Serial Data
SCL	A5	21	Serial Clock

Required Libraries

You will need two libraries from Adafruit:

- Adafruit LED Backpack Library
- Adafruit GFX Library

Install these via the Arduino Library Manager (*Tools > Manage Libraries...*).

Arduino Example Code

This sketch demonstrates basic numeric display and colon control using the [Adafruit_LED_Backpack](#) library.

```
#include <Wire.h>
#include <Adafruit_GFX.h>
#include "Adafruit_LEDBackpack.h"

// Create the display object (Default I2C address is 0x70)
Adafruit_7segment matrix = Adafruit_7segment();

void setup() {
  matrix.begin(0x70); // Initialize with I2C address
  matrix.setBrightness(10); // Set brightness from 0 to 15
}

void loop() {
  // 1. Display a whole number
  matrix.print(1234, DEC);
  matrix.writeDisplay();
  delay(2000);

  // 2. Display a floating point number
  matrix.print(12.34);
  matrix.writeDisplay();
  delay(2000);

  // 3. Simple Counter with blinking colon
  for (uint16_t counter = 0; counter < 100; counter++) {
    matrix.println(counter);
    matrix.drawColon(counter % 2 == 0); // Blink colon every other tick
    matrix.writeDisplay();
    delay(200);
  }
}
```

<https://docs.arduino.cc/libraries/simple-ht16k33-library/>

Sources

<https://www.digikey.com/htmldatasheets/production/2070902/0/0/1/ht16k33.html>

I²C topics on lamaPLC

Page	Date	Tags
• lamaPLC Communication: 1-Wire	2026/04/23 21:51	1-wire , communication , bus , microlan , i2c , uart , usart , ds18b20
• lamaPLC Communication: I²C	2025/09/23 21:25	i2c , i c , smbus , philips , bus , communication , arduino
• LamaPLC: AHT10 Modul	2026/03/22 03:14	communication , i2c , temperature , humidity , sensor , aht , aht 10 , modul
• LamaPLC: AHT20 / BMP280 Modul	2026/04/23 21:52	bmp280 , aht20 , adafruit , temperature , humidity , pressure , sensor , arduino , code , i2c
• LamaPLC: APDS - Avago ALS and proximity detection sensors with I²C communication	2026/04/23 21:52	avago , apds-9900 , apds-9930 , apds-9960 , als , proximity , detection , gesture recognition , gesture , i2c , communication , sensor , arduino , code
• lamaPLC: AS5600 Magnetic Induction Angle Measurement Sensor Module	2026/03/28 23:50	communication , i2c , as5600 , as-5600 , magnetic , induction , angle , sensor
• lamaPLC: Bi-Directional Logic Level Converter 3.3V ↔ 5V	2026/04/12 00:34	bi-directional , logic level converter , i2c , uart , spi
• LamaPLC: BMP/BME Bosch Temperature/Humidity/Pressure sensors with I²C communication	2026/04/23 21:52	bme280 , bme680 , bmp180 , bmp280 , hw-611 , hw611 , bosch , temperature , humidity , pressure , sensor , arduino , i2c , communication , cjmcu
• LamaPLC: CJMCU-219/INA-219 breakout board/IC with I²C communication	2026/04/23 21:52	cjmcu-219 , ina-219 , ina219 , breakout board , i2c , communication , sensor , voltage , current , arduino , code , cjmcu
• LamaPLC: CJMCU-3216 / AP-3216 integrated digital ambient light and proximity sensor module/IC with I²C communication	2026/04/23 21:52	cjmcu-3216 , cjmcu , ap-3216 , ap3216 , ambient light , proximity , sensor , arduino , code , i2c , communication
• lamaPLC: CJMCU-811 CCS811 Gas Sensor (VOCs TVOC CO2)	2026/03/22 00:08	cjmcu-811 , ccs811 , gas , sensor , vocs , tvoc , eco2 , co2 , arduino , air quality , metal oxide , mox , i2c
• LamaPLC: D6T Omron Non-Contact Thermal Sensors with I²C communication	2026/04/23 21:52	d6t , d6t-32l , d6t-44l , d6t-8l , d6t-1a , omron , non-contact , thermal , sensor , i2c , arduino , code
• LamaPLC: DPS Infineon Temperature/Pressure sensors with I²C communication	2026/04/23 21:52	dps310 , infineon , temperature , pressure , sensor , arduino , i2c , communication , code
• lamaPLC: Energy, power, current, and voltage	2025/05/31 23:32	i2c , i c , communication , arduino , energy , power , current , sensor , ina226
• LamaPLC: ENS ScioSense Multi-gas sensors with I²C communication	2026/04/23 21:52	ens160 , sciosense , gas-quality , i2c , communication , sensor , arduino , code , eco2 , tvoc , aqi , indoor air quality , iaq , co2 , voc

• lamaPLC: ESP32 / ESP8266	2025/11/22 00:07	esp8266, esp32, esp32-c2, esp32-c3, esp32-c5, esp32-c6, esp32-c61, esp32-h2, esp32-s2, esp32-s3, esp32-p4, espressif systems, communication, ethernet, ip, wi-fi, thread, zigbee, matter, homekit, bluetooth, mqtt, adc, spi, uart, i2c, i2s, rmt, pwm, usb, usb otg, twai
• LamaPLC: Gas sensors	2023/07/01 17:29	gas, sensor, i2c, onewire, communication, mq-3, mq-4, mq-5, mq-6, mq-7, mq-8, mq-9, mq-135, gm-102b, gm-302b, gm-502b, gm-702b, alcohol, ch4, natural gas, smoke, lng, co, co2, lpg, h2, iso-butane, nox, nh3, benzene, town gas, formaldehyde, propane, humidity, temperature, voc, grv gas sens v2
• lamaPLC: GY-511 6DOF sensor module	2026/03/22 01:44	stmicroelectronics, lsm303dlhc, i2c, lsm303, sensor, gy-511, 6dof, pololu, module, arduino
• LamaPLC: GY-9250 MPU-9250/6500 9-axis Attitude Sensor Board	2026/04/23 21:52	ak8963, gy-9250, mpu-9250, 9-axis, motion detection, magnetometer, communication, i c, i2c, spi
• LamaPLC: HDC Texas Instruments Temperature/humidity sensors with I²C communication	2026/04/23 21:52	sht21, htu21, si7021, gy-21, gy-213v, hdc1080, gy-213v-hdc1080, cjmcu, cjmcu-1080, texas instruments, temperature, humidity, sensor, i2c, communication, arduino, code
• lamaPLC: HT16K33 display controller	2026/04/23 21:51	i2c, 7-segment display, display, ht16k33, arduino
• LamaPLC: HTU TE Connectivity temperature/humidity sensors with I²C communication	2026/04/23 21:52	htu, htu31d, htu21d, htu20d, sht20, htu20, sht21, htu21, si7021, gy-21, gy-213v, hdc1080, si702, gy-20, sht31, htu31, si7031, gy-31, te connectivity, temperature, humidity, i2c, communication, sensor, arduino, code
• lamaPLC: INA modules with Arduino libraries	2026/04/11 19:54	i2c, i c, communication, arduino, energy, power, current, monitor, sensor, ina219, gy-219, ina226, gy-216, ina228, gy-228, ina237, ina238, ina260, ina3221, ina
• lamaPLC: INA226 - current/voltage/power monitor with I²C communication	2026/04/23 21:52	i2c, i c, communication, arduino, energy, power, current, monitor, sensor, ina226, ina219, ina
• lamaPLC: LCD 1602/2004 with I²C communication	2026/02/14 18:27	communication, i2c, display, lcd, 1602, 2004, hd44780, pcf8574, pcf8574t, pcf8574at, arduino
• LamaPLC: MAX30100/MAX30102 Heart Rate Click Sensor Module	2026/04/23 21:52	max30102, max30100, heart rate click, sensor, communication, i2c, arduino, code
• lamaPLC: MCP23017 / MCP23S17 16-Bit I/O Expander with Serial Interface I²C / SPI	2026/04/23 21:52	communication, i2c, mcp23017, mcp23s17, spi, i o expander, serial, cjmcu-2317, cjmcu

- [LamaPLC: Pixart PAJ7620U2 Gesture recognition sensors/module with I²C communication](#) 2026/04/23 21:52 [paj7620u2, gy-paj7620, pixart, gesture recognition, i2c, communication, sensor, arduino, code](#)
- [LamaPLC: SC16IS750 / SC16IS752: One or two serial \(UART\) ports from microcontroller via I²C or SPI communication](#) 2026/04/23 21:52 [cjmcu-750, cjmcu-752, cjmcu, nxp, sc16is750, sc16is752, uart, serial, i2c, spi, modul, converter, arduino, code](#)
- [LamaPLC: SGP Sensirion TVOC/VOC sensors with I²C communication](#) 2026/04/15 19:41 [sgp30, sgp40, sgp41, sensirion, gas-sensor, i2c, communication, sensor, arduino, code, eco2, voc, tvoc, indoor air quality, iaq, nox, hydrogen](#)
- [LamaPLC: SHT Sensirion Temperature/humidity sensor with I²C communication](#) 2026/04/23 21:52 [sht20, sht21, sht25, sht30, sht31, sht35, sht40, gy21, temperature, humidity, i2c, communication, sensor, arduino, code](#)
- [lamaPLC: Signal level converters](#) 2026/02/14 23:47 [pca9306, i2c, voltage, level, converter](#)
- [lamaPLC: TCA9548A \(HW617\); Low-Voltage 8-Channel I²C Switch Module](#) 2026/02/14 23:51 [tca9548a, hw617, i2c, switch, communication, expansion board, arduino](#)
- [lamaPLC: TM1637 7-segment display](#) 2026/02/14 18:26 [i2c, 7-segment display, display, tm1637, arduino](#)
- [LamaPLC: TOFnnnC STMicroelectronics Time-of-Flight \(ToF\) sensors with I²C communication](#) 2026/04/23 21:52 [tof050c, vl6180, tof200c, vl53l0x, tof400c, vl53l1x, stmicroelectronics, time-of-flight, tof, i2c, communication, sensor, arduino, code](#)
- [LamaPLC: VL53Lnn STMicroelectronics time-of-flight \(ToF\) laser-ranging sensors with I²C communication](#) 2026/04/23 21:52 [vl53l0x, vl53l1x, vl53l0 1xv2, gy-530, time-of-flight, tof, laser-ranging, i2c, communication, sensor, arduino, code](#)
- [LamaPLC: VL6180X STMicroelectronics Time-of-Flight \(ToF\) sensor with I²C communication](#) 2026/04/23 21:52 [vl6180x, stmicroelectronics, time-of-flight, tof, i2c, communication, sensor, arduino, code](#)
- [Magnetic angle sensors](#) 2026/03/05 21:19 [magnetic angle sensor, magnetic flux, sensor, spi, i2c, pwm, communication, modul, as5047p, as5600, mt6701, mt6816, mt6835, tle5012b, amr, gmr, tmr, anisotropic magnetoresistive](#)
- [SSH1106/SSD1306 OLED Display with I²C communication](#) 2026/02/14 18:27 [i2c, oled, display, ssd1306, sh1106, ssh1106, arduino, cmos](#)

[i2c, 7-segment display, display, HT16K33, Arduino](#)

This page has been accessed for: Today: 4, Until now: 5

From: <https://www.lamapl.de/> - **lamaPLC**

Permanent link: <https://www.lamapl.de/doku.php?id=display:ht16k33>

Last update: **2026/04/21 20:47**



