




Using the HX711 with a load cell is a common method for building digital scales or force measurement systems due to its simplicity, low cost, and high precision. The process involves correctly wiring the load cell's four wires to the HX711 board, connecting the board to a microcontroller, using a library, and performing a simple calibration.

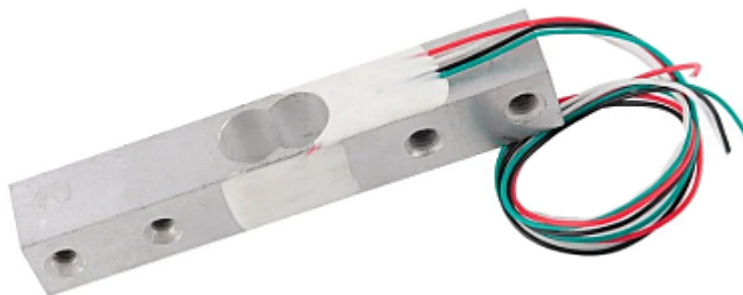


The HX711 is purpose-built to interface with **Wheatstone bridges**, which are the internal circuits of load cells and strain gauges. It provides the necessary excitation voltage to power the bridge and precisely measures the resulting minute differential voltage changes.

### Wiring the Components

A standard four-wire load cell uses a color-coded system to identify the wires for excitation voltage and the output signal.

### Load Cell to HX711 Connections

#### Load cell wiring

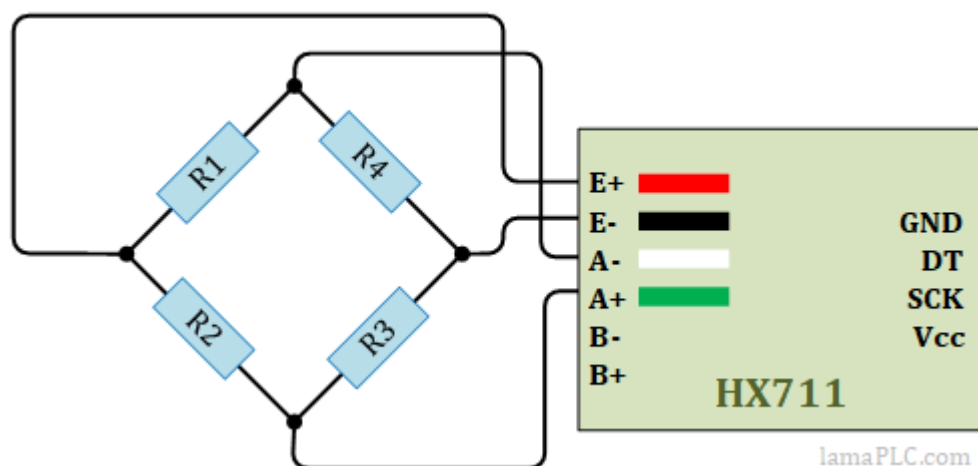

Connect the load cell wires to the corresponding terminals on the HX711 board:

- **Red Wire (E+):** Connect to HX711's E+ terminal (Excitation Positive).
- **Black Wire (E-):** Connect to HX711's E- terminal (Excitation Negative).
- **Green Wire (A+):** Connect to HX711's A+ terminal (Signal Positive).
- **White Wire (A-):** Connect to HX711's A- terminal (Signal Negative).



If you'd like to support the development of the site with the price of a coffee — or a few — [please do so here](#).

Here's a handy tip: you can quickly save this page as a PDF by clicking "export to PDF" in the menu on the right side of the screen.

## HX711 module board pinout

The HX711 module is a 24-bit ADC meant for weight scales, serving as an interface between a load cell (bridge sensor) and a microcontroller. It usually features two pin sets: one for connecting the load cell (input) and another for the microcontroller (output).

Pin Label	Name	Description	Typical Wire Colour
<b>E+</b>	Excitation Positive	Positive supply to the load cell.	Red
<b>E-</b>	Excitation Negative	Ground/Negative supply to the load cell.	Black
<b>A-</b>	Channel A Negative	Negative differential signal input from the load cell.	White
<b>A+</b>	Channel A Positive	Positive differential signal input from the load cell.	Green
<b>B-</b>	Channel B Negative	Secondary input channel (lower priority/gain).	—
<b>B+</b>	Channel B Positive	Secondary input channel (lower priority/gain).	—
<b>Vcc</b>	Supply Voltage	Power supply for the module ( <b>2.7V to 5.5V</b> ).	—
<b>GND</b>	Ground	Common circuit ground.	—
<b>DT / DAT</b>	Data Out	Serial data output to the microcontroller.	—
<b>SCK / CLK</b>	Serial Clock	Clock signal input from the microcontroller.	—

### Key Connection Notes

- **Microcontroller Pins:** The DT and SCK pins can be connected to any digital GPIO pins on your Arduino or ESP32; they do not require specific hardware SPI pins.
- **Channel A vs. B:** Channel A is the primary input and supports a gain of 128 or 64. Channel B is for a second load cell and has a fixed gain of 32.
- **Voltage Logic:** If you are using a 3.3V microcontroller (like an ESP32), ensure the module is powered appropriately. While many modules work at 3.3V, some “green” boards require a 5V supply to properly excite the load cell.
- **Drift Prevention:** For the best accuracy, keep the load cell wires short and use a stable power source, as the HX711 is extremely sensitive to voltage fluctuations.

## Arduino & HX711

To get started, you'll need the HX711 Arduino Library by bogde, which is the community standard. You can install it directly via the Arduino Library Manager.

### Software Setup and Calibration

You will need a library to easily communicate with the HX711 using your microcontroller. The **HX711 library** by Bogdan Necula is a popular, well-maintained option available in the Arduino Library Manager.

- **Upload Calibration Code:** Use example code from the library to get the raw readings. With the load cell unloaded, record the “tare” value.
- **Apply Known Weight:** Place an object of a known weight (e.g., a 100g calibration weight) on the load cell and record the new raw reading.
- **Calculate the Calibration Factor:** The calibration factor is calculated using the formula:  

$$\text{Calibration Factor} = (\text{Raw Reading with Weight} - \text{Tare}) / \text{Known Weight}$$
- **Update Code:** Update your main program with this calibration factor using the

`scale.set_scale(calibration_factor)` function in the library. The scale is now ready to provide accurate weight measurements.

## Wiring Diagram

HX711 Pin	Arduino Pin
VCC	5V (or 3.3V)
GND	GND
DT (Data)	D3
SCK (Clock)	D2

## Basic Reading & Calibration Code

This script initialises the scale, “tares” it (sets it to zero), and reads the weight.

```
#include "HX711.h"

// Pin definitions
const int LOADCELL_DOUT_PIN = 3;
const int LOADCELL_SCK_PIN = 2;

HX711 scale;

void setup() {
  Serial.begin(57600);
  Serial.println("Initializing the scale...");

  scale.begin(LOADCELL_DOUT_PIN, LOADCELL_SCK_PIN);

  // --- CALIBRATION ---
  // 1. Upload this code with scale.set_scale() empty or set to 1.
  // 2. Put a known weight (e.g. 100g) on the scale.
  // 3. Divide the raw reading by the known weight to find this factor.
  scale.set_scale(2280.f); // Replace 2280.f with your calculated
  // calibration factor
  scale.tare(); // Reset the scale to 0

  Serial.println("Scale ready!");
}

void loop() {
  if (scale.is_ready()) {
    long reading = scale.get_units(10); // Average of 10 readings
    Serial.print("Weight: ");
    Serial.print(reading);
    Serial.println(" g");
  } else {
    Serial.println("HX711 not found.");
  }
}
```

```
delay(1000);
}
```

## Critical Tips

- **The Calibration Factor:** Every load cell is physically different. If your readings are off by a lot, use the Calibration Tutorials to find your specific value.
- **Baud Rate:** Many HX711 examples use 57600 baud. Ensure your Serial Monitor matches the `Serial.begin()` value, or you will see gibberish.
- **Drift:** Cheap load cells drift with temperature. If accuracy degrades over time, consider the [ADS1220](#) we discussed earlier; it includes an internal temperature sensor to help you compensate.

## Sensor topics on lamaPLC

Page	Date	Tags
• <a href="#">lamaPLC project: Arduino - OLED SH1106 with AHT20/BMP280 Sensor</a>	2026/04/23 21:51	<a href="#">bmp280</a> , <a href="#">aht20</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">pressure</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">oled</a> , <a href="#">sh1106</a> , <a href="#">arduino code</a>
• <a href="#">lamaPLC project: Arduino - Vibration sensors</a>	2026/04/15 17:21	<a href="#">vibration</a> , <a href="#">sensor</a> , <a href="#">piezoelectric</a> , <a href="#">mems</a> , <a href="#">eddy-current</a> , <a href="#">electrodynamic</a> , <a href="#">gxfm0459</a> , <a href="#">ldtm-028k</a> , <a href="#">arduino</a> , <a href="#">arduino code</a>
• <a href="#">lamaPLC project: Digitales Potentiometer Board Modul</a>	2026/04/11 18:29	<a href="#">sensor</a> , <a href="#">module</a> , <a href="#">arduino code</a> , <a href="#">renesas</a> , <a href="#">x9c series</a> , <a href="#">x9c102</a> , <a href="#">x9c103</a> , <a href="#">x9c104</a> , <a href="#">x9c503</a> , <a href="#">xdcp</a> , <a href="#">digitally controlled potentiometer</a>
• <a href="#">lamaPLC project: Sension SCD CO<sup>2</sup> measurement module</a>	2026/04/15 19:34	<a href="#">bmp280</a> , <a href="#">aht20</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">pressure</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">oled</a> , <a href="#">sh1106</a> , <a href="#">arduino code</a>
• <a href="#">lamaPLC: A0221AU / A02YYUW Waterproof Ultrasonic Distance Sensor with UART communication</a>	2026/04/23 21:52	<a href="#">a0221au</a> , <a href="#">a02yyuw</a> , <a href="#">waterproof</a> , <a href="#">ultrasonic</a> , <a href="#">distance</a> , <a href="#">sensor</a> , <a href="#">uart</a> , <a href="#">ip67</a> , <a href="#">serial</a> , <a href="#">sen0311</a> , <a href="#">dfrobot</a>
• <a href="#">LamaPLC: AHT10 Modul</a>	2026/03/22 03:14	<a href="#">communication</a> , <a href="#">i2c</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">sensor</a> , <a href="#">aht</a> , <a href="#">aht 10</a> , <a href="#">modul</a>
• <a href="#">LamaPLC: AHT20 / BMP280 Modul</a>	2026/04/23 21:52	<a href="#">bmp280</a> , <a href="#">aht20</a> , <a href="#">adafruit</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">pressure</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a> , <a href="#">i2c</a>
• <a href="#">LamaPLC: Allegro ACS758 Hall-effect linear current sensors</a>	2026/04/23 21:52	<a href="#">cjmcu</a> , <a href="#">cjmcu-758</a> , <a href="#">acs758</a> , <a href="#">acs758lcb-050b</a> , <a href="#">acs758lcb-100b</a> , <a href="#">acs758kcb-150b</a> , <a href="#">acs758ecb-200b</a> , <a href="#">hall-effect</a> , <a href="#">current</a> , <a href="#">sensor</a> , <a href="#">analog</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">LamaPLC: APDS - Avago ALS and proximity detection sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">avago</a> , <a href="#">apds-9900</a> , <a href="#">apds-9930</a> , <a href="#">apds-9960</a> , <a href="#">als</a> , <a href="#">proximity</a> , <a href="#">detection</a> , <a href="#">gesture recognition</a> , <a href="#">gesture</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">lamaPLC: AS5600 Magnetic Induction Angle Measurement Sensor Module</a>	2026/03/28 23:50	<a href="#">communication</a> , <a href="#">i2c</a> , <a href="#">as5600</a> , <a href="#">as-5600</a> , <a href="#">magnetic</a> , <a href="#">induction</a> , <a href="#">angle</a> , <a href="#">sensor</a>

• <a href="#">LamaPLC: BMP/BME Bosch Temperature/Humidity/Pressure sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">bme280</a> , <a href="#">bme680</a> , <a href="#">bmp180</a> , <a href="#">bmp280</a> , <a href="#">hw-611</a> , <a href="#">hw611</a> , <a href="#">bosch</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">pressure</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">cjmcu</a>
• <a href="#">LamaPLC: BQ25570 / CJMCU-2557 - Texas Instruments nano-power management IC and module</a>	2026/04/23 21:52	<a href="#">bq25570</a> , <a href="#">sensor</a> , <a href="#">texas instruments</a> , <a href="#">nano-power management</a> , <a href="#">dc-dc boost charger</a> , <a href="#">mppt</a> , <a href="#">solar</a> , <a href="#">thermoelectric</a> , <a href="#">piezoelectric</a>
• <a href="#">LamaPLC: CJMCU-219/INA-219 breakout board/IC with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">cjmcu-219</a> , <a href="#">ina-219</a> , <a href="#">ina219</a> , <a href="#">breakout board</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">voltage</a> , <a href="#">current</a> , <a href="#">arduino</a> , <a href="#">code</a> , <a href="#">cjmcu</a>
• <a href="#">LamaPLC: CJMCU-3216 / AP-3216 integrated digital ambient light and proximity sensor module/IC with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">cjmcu-3216</a> , <a href="#">cjmcu</a> , <a href="#">ap-3216</a> , <a href="#">ap3216</a> , <a href="#">ambient light</a> , <a href="#">proximity</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a> , <a href="#">i2c</a> , <a href="#">communication</a>
• <a href="#">LamaPLC: CJMCU-3901/PMW-3901 compact optical flow sensor module/IC by PixArt with SPI communication</a>	2026/04/23 21:52	<a href="#">cjmcu-3901</a> , <a href="#">cjmcu</a> , <a href="#">pmw3901</a> , <a href="#">pmw-3901</a> , <a href="#">optical flow</a> , <a href="#">sensor</a> , <a href="#">pixart</a> , <a href="#">spi</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">code</a> , <a href="#">pmw3901mb-txqt</a>
• <a href="#">LamaPLC: CJMCU-6701: Biosensor for measuring Galvanic Skin Response (GSR) with SPI communication</a>	2026/04/23 21:52	<a href="#">cjmcu</a> , <a href="#">cjmcu-6701</a> , <a href="#">acs758</a> , <a href="#">acs-758</a> , <a href="#">galvanic skin response</a> , <a href="#">gsr</a> , <a href="#">electrodermal activity</a> , <a href="#">eda</a> , <a href="#">spi</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">code</a> , <a href="#">sensor</a> , <a href="#">healthcare</a>
• <a href="#">LamaPLC: CJMCU-6814 combined gas sensor module for CO, NO<sub>2</sub>, NH<sub>3</sub></a>	2026/04/23 21:52	<a href="#">analog</a> , <a href="#">cjmcu</a> , <a href="#">cjmcu-6814</a> , <a href="#">mics6814</a> , <a href="#">mics-6814</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a> , <a href="#">carbon monoxide</a> , <a href="#">co</a> , <a href="#">ammonia</a> , <a href="#">nh<sub>3</sub></a> , <a href="#">nitrogen dioxide</a> , <a href="#">no<sub>2</sub></a>
• <a href="#">LamaPLC: CJMCU-811 CCS811 Gas Sensor (VOCs TVOC CO<sub>2</sub>)</a>	2026/03/22 00:08	<a href="#">cjmcu-811</a> , <a href="#">ccs811</a> , <a href="#">gas</a> , <a href="#">sensor</a> , <a href="#">vocs</a> , <a href="#">tvoc</a> , <a href="#">eco2</a> , <a href="#">co2</a> , <a href="#">arduino</a> , <a href="#">air quality</a> , <a href="#">metal oxide</a> , <a href="#">mox</a> , <a href="#">i2c</a>
• <a href="#">LamaPLC: CJMCU-8221 Analog Devices Precision instrumentation amplifier module</a>	2026/04/23 21:52	<a href="#">cjmcu-8221</a> , <a href="#">ad8221ar</a> , <a href="#">analog devices</a> , <a href="#">amplifier</a> , <a href="#">sensor</a> , <a href="#">cjmcu</a>
• <a href="#">LamaPLC: D6T Omron Non-Contact Thermal Sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">d6t</a> , <a href="#">d6t-32l</a> , <a href="#">d6t-44l</a> , <a href="#">d6t-8l</a> , <a href="#">d6t-1a</a> , <a href="#">omron</a> , <a href="#">non-contact</a> , <a href="#">thermal</a> , <a href="#">sensor</a> , <a href="#">i2c</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">LamaPLC: DHT Temperature /Humidity sensors with 1-wire / I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">dht11</a> , <a href="#">dht20</a> , <a href="#">dht22</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">pressure</a> , <a href="#">sensor</a> , <a href="#">1-wire</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">LamaPLC: DPS Infineon Temperature/Pressure sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">dps310</a> , <a href="#">infineon</a> , <a href="#">temperature</a> , <a href="#">pressure</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">code</a>
• <a href="#">LamaPLC: DS18B20 1-Wire Digital Thermometer</a>	2026/04/23 21:52	<a href="#">ds18b20</a> , <a href="#">sensor</a> , <a href="#">1-wire</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">thermometer</a> , <a href="#">parasitic mode</a>
• <a href="#">LamaPLC: Energy, power, current, and voltage</a>	2025/05/31 23:32	<a href="#">i2c</a> , <a href="#">i c</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">energy</a> , <a href="#">power</a> , <a href="#">current</a> , <a href="#">sensor</a> , <a href="#">ina226</a>
• <a href="#">LamaPLC: ENS ScioSense Multi-gas sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">ens160</a> , <a href="#">sciosense</a> , <a href="#">gas-quality</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a> , <a href="#">eco2</a> , <a href="#">tvoc</a> , <a href="#">aqi</a> , <a href="#">indoor air quality</a> , <a href="#">iaq</a> , <a href="#">co<sub>2</sub></a> , <a href="#">voc</a>

• <a href="#">lamaPLC: ENS160 + AHT21 Air Quality Sensor - CO, ECO, TVOC, Temp &amp; Humidity Module</a>	2026/04/23 21:52	<a href="#">arduino</a> , <a href="#">ens160</a> , <a href="#">aht21</a> , <a href="#">air quality</a> , <a href="#">sensor</a> , <a href="#">co</a> , <a href="#">eco</a> , <a href="#">tvoc</a> , <a href="#">module</a> , <a href="#">aqi</a>
• <a href="#">LamaPLC: Gas sensors</a>	2023/07/01 17:29	<a href="#">gas</a> , <a href="#">sensor</a> , <a href="#">i2c</a> , <a href="#">onewire</a> , <a href="#">communication</a> , <a href="#">mq-3</a> , <a href="#">mq-4</a> , <a href="#">mq-5</a> , <a href="#">mq-6</a> , <a href="#">mq-7</a> , <a href="#">mq-8</a> , <a href="#">mq-9</a> , <a href="#">mq-135</a> , <a href="#">gm-102b</a> , <a href="#">gm-302b</a> , <a href="#">gm-502b</a> , <a href="#">gm-702b</a> , <a href="#">alcohol</a> , <a href="#">ch4</a> , <a href="#">natural gas</a> , <a href="#">smoke</a> , <a href="#">lng</a> , <a href="#">co</a> , <a href="#">co2</a> , <a href="#">lpg</a> , <a href="#">h2</a> , <a href="#">iso-butane</a> , <a href="#">nox</a> , <a href="#">nh3</a> , <a href="#">benzene</a> , <a href="#">town gas</a> , <a href="#">formaldehyde</a> , <a href="#">propane</a> , <a href="#">humidity</a> , <a href="#">temperature</a> , <a href="#">voc</a> , <a href="#">grv gas sens v2</a>
• <a href="#">LamaPLC: GM MEMS Gas-sensors</a>	2026/04/23 21:52	<a href="#">gm-102b</a> , <a href="#">gm-302b</a> , <a href="#">gm-502b</a> , <a href="#">gm-702b</a> , <a href="#">mems</a> , <a href="#">gas-quality</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a> , <a href="#">nitrogen dioxide</a> , <a href="#">no2</a> , <a href="#">volatile organic compounds</a> , <a href="#">voc</a> , <a href="#">carbon monoxide</a> , <a href="#">co</a> , <a href="#">ethyl alcohol</a> , <a href="#">c2h5ch</a> , <a href="#">formaldehyde</a> , <a href="#">ch2o</a> , <a href="#">alcohol</a> , <a href="#">c2h5oh</a>
• <a href="#">lamaPLC: GY-511 6DOF sensor module</a>	2026/03/22 01:44	<a href="#">stmicroelectronics</a> , <a href="#">lsm303dlhc</a> , <a href="#">i2c</a> , <a href="#">lsm303</a> , <a href="#">sensor</a> , <a href="#">gy-511</a> , <a href="#">6dof</a> , <a href="#">pololu</a> , <a href="#">module</a> , <a href="#">arduino</a>
• <a href="#">LamaPLC: HC-SR04 Ultrasonic Sensor Module</a>	2026/04/23 21:52	<a href="#">hc-sr04</a> , <a href="#">ultrasonic</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">LamaPLC: HDC Texas Instruments Temperature/humidity sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">sht21</a> , <a href="#">htu21</a> , <a href="#">si7021</a> , <a href="#">gy-21</a> , <a href="#">gy-213v</a> , <a href="#">hdc1080</a> , <a href="#">gy-213v-hdc1080</a> , <a href="#">cjmcu</a> , <a href="#">cjmcu-1080</a> , <a href="#">texas instruments</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">sensor</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">LamaPLC: HTU TE Connectivity temperature/humidity sensors with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">htu</a> , <a href="#">htu31d</a> , <a href="#">htu21d</a> , <a href="#">htu20d</a> , <a href="#">sht20</a> , <a href="#">htu20</a> , <a href="#">sht21</a> , <a href="#">htu21</a> , <a href="#">si7021</a> , <a href="#">gy-21</a> , <a href="#">gy-213v</a> , <a href="#">hdc1080</a> , <a href="#">si702</a> , <a href="#">gy-20</a> , <a href="#">sht31</a> , <a href="#">htu31</a> , <a href="#">si7031</a> , <a href="#">gy-31</a> , <a href="#">te connectivity</a> , <a href="#">temperature</a> , <a href="#">humidity</a> , <a href="#">i2c</a> , <a href="#">communication</a> , <a href="#">sensor</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">LamaPLC: HX711 24-bit analog-to-digital converter (ADC)</a>	2026/04/11 18:28	<a href="#">hx711</a> , <a href="#">hx-711</a> , <a href="#">analog-to-digital</a> , <a href="#">adc</a> , <a href="#">converter</a> , <a href="#">load cell</a> , <a href="#">wheatstone bridge</a> , <a href="#">weight</a> , <a href="#">sensor</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">code</a>
• <a href="#">lamaPLC: INA modules with Arduino libraries</a>	2026/04/11 19:54	<a href="#">i2c</a> , <a href="#">i c</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">energy</a> , <a href="#">power</a> , <a href="#">current</a> , <a href="#">monitor</a> , <a href="#">sensor</a> , <a href="#">ina219</a> , <a href="#">gy-219</a> , <a href="#">ina226</a> , <a href="#">gy-216</a> , <a href="#">ina228</a> , <a href="#">gy-228</a> , <a href="#">ina237</a> , <a href="#">ina238</a> , <a href="#">ina260</a> , <a href="#">ina3221</a> , <a href="#">ina</a>
• <a href="#">lamaPLC: INA226 - current/voltage/power monitor with I<sup>2</sup>C communication</a>	2026/04/23 21:52	<a href="#">i2c</a> , <a href="#">i c</a> , <a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">energy</a> , <a href="#">power</a> , <a href="#">current</a> , <a href="#">monitor</a> , <a href="#">sensor</a> , <a href="#">ina226</a> , <a href="#">ina219</a> , <a href="#">ina</a>
• <a href="#">lamaPLC: LTC3588 - Nanopower energy harvesting power supply IC</a>	2026/04/23 21:52	<a href="#">communication</a> , <a href="#">arduino</a> , <a href="#">sensor</a> , <a href="#">energy harvesting</a> , <a href="#">energy</a> , <a href="#">ambient power</a>
• <a href="#">LamaPLC: M01 - V0.4 Laser ranging sensor with UART communication</a>	2026/04/23 21:52	<a href="#">distance measurement</a> , <a href="#">laser</a> , <a href="#">distance</a> , <a href="#">sensor</a> , <a href="#">m01</a>

- [LamaPLC: MAX30100/MAX30102 Heart Rate Click Sensor Module](#) 2026/04/23 21:52 [max30102, max30100, heart rate click, sensor, communication, i2c, arduino, code](#)
- [lamaPLC: Max31865 RTD to Digital Converter - PT100/PT1000 Platine](#) 2026/04/23 21:52 [max31865, rtd, pt 100, pt 1000, temperature, spi, platinum, arduino, code, sensor, adafruit](#)
- [LamaPLC: MAX4466/MAX9814: Low-noise Microphone Preamplifiers](#) 2026/04/23 21:52 [audio, microphone, analogue audio, max4466, max9814, max 4466, max 9814, agc, preamplifiers, sensor, arduino, code](#)
- [LamaPLC: MH-Z19 series of NDIR CO<sub>2</sub> sensors](#) 2026/04/23 21:52 [mh-z19, mh-z19d, mh-z19c, mh-z19b, mh-z19e, ndir, co<sub>2</sub>, sensor, winsen, uart, pwm, communication, non-dispersive infrared, infrared, ir, temperature, arduino, code, tasmota](#)
- [lamaPLC: MPU-6050 \(HW-123, GY-521\) 6-axis MotionTracking device](#) 2026/03/22 03:13 [mpu-6050, hw-123, gy-521, 6-axis motiontracking, dmp, temperature, sensor, mems, arduino code, arduino, accelerometer, gyroscope, tilt](#)
- [LamaPLC: MQ Winsen Gas-sensors](#) 2026/04/23 21:52 [mq, mq-2, mq-3, mq-4, mq-5, mq-6, mq-7, mq-8, mq-9, mq-131, mq-135, mq-137, winsen, gas-sensor, sensor, arduino, code, alcohol, c<sub>2</sub>h<sub>5</sub>oh, benzine gas, smoke, lpg, propane, c<sub>3</sub>h<sub>8</sub>, hydrogen, h<sub>2</sub>, methane, ch<sub>4</sub>, iso-butane, town gas, ammonia, nh<sub>3</sub>](#)
- [LamaPLC: PIR sensors](#) 2026/04/23 21:52 [hc-sr501, hc-sr505, am-312, ekmb ekmc, pir, motion, sensor, arduino, code](#)
- [LamaPLC: Pixart PAJ7620U2 Gesture recognition sensors/module with I<sup>2</sup>C communication](#) 2026/04/23 21:52 [paj7620u2, gy-paj7620, pixart, gesture recognition, i2c, communication, sensor, arduino, code](#)
- [lamaPLC: PT100 / PT1000](#) 2025/09/23 18:59 [pt100, pt1000, temperature, sensor, platine, rtd](#)
- [lamaPLC: PTA8C04 4-channel PT100 Modbus Modul](#) 2026/02/14 18:42 [pta8c04, sensor, modbus, rtu, rs-485, communication, platine, um72](#)
- [LamaPLC: RCWL - Microwave radar sensor](#) 2026/04/23 21:52 [rcwl-0516, rcwl, microwave, radar, sensor, arduino, code](#)
- [lamaPLC: RD-xx - Ai-Thinker Radar Module with UART communication](#) 2026/04/23 21:52 [radar, s3km1110, fmcw, rd-01, rd-03, rd-03d, ai-thinker, k-band, 24 ghz, sensor, distance, micro-movements](#)
- [LamaPLC: SGP Sensirion TVOC/VOC sensors with I<sup>2</sup>C communication](#) 2026/04/15 19:41 [sgp30, sgp40, sgp41, sensirion, gas-sensor, i2c, communication, sensor, arduino, code, eco<sub>2</sub>, voc, tvoc, indoor air quality, iaq, nox, hydrogen](#)
- [LamaPLC: SHT Sensirion Temperature/humidity sensor with I<sup>2</sup>C communication](#) 2026/04/23 21:52 [sht20, sht21, sht25, sht30, sht31, sht35, sht40, gy21, temperature, humidity, i2c, communication, sensor, arduino, code](#)

- [LamaPLC: Texas Instruments ADCs: Delta-sigma multi-channel Analog Converters with SPI communication](#) 2026/04/23 21:52  
 ads111x, ads12xx, delta-sigma, converter, texas instruments, adc, spi, communication, sensor, arduino, code, ads1110, ads1112, ads1113, ads1114, ads1115, ads1118, ads1119, ads1220, ads1232, ads1234, ads1256, ads1261, ads1263, multi channel
- [LamaPLC: TOFnnnC STMicroelectronics Time-of-Flight \(ToF\) sensors with I<sup>2</sup>C communication](#) 2026/04/23 21:52  
 tof050c, vl6180, tof200c, vl53l0x, tof400c, vl53l1x, stmicroelectronics, time-of-flight, tof, i2c, communication, sensor, arduino, code
- [LamaPLC: UICPAL Temp.humi.sensor](#) 2023/06/25 00:43  
 simatic, s7, modbus, communication, temperature, humidity, sensor
- [LamaPLC: VL53Lnn STMicroelectronics time-of-flight \(ToF\) laser-ranging sensors with I<sup>2</sup>C communication](#) 2026/04/23 21:52  
 vl53l0x, vl53l1x, vl53l0 1xv2, gy-530, time-of-flight, tof, laser-ranging, i2c, communication, sensor, arduino, code
- [LamaPLC: VL6180X STMicroelectronics Time-of-Flight \(ToF\) sensor with I<sup>2</sup>C communication](#) 2026/04/23 21:52  
 vl6180x, stmicroelectronics, time-of-flight, tof, i2c, communication, sensor, arduino, code
- [LamaPLC: Waveshare TOF Laser Range Sensor with UART / I<sup>2</sup>C communication](#) 2026/04/23 21:52  
 distance measurement, laser, range, sensor, tof, waveshare
- [lamaPLC: YR-3180 - Weight sensor module with UART or Modbus communication](#) 2026/02/15 00:00  
 communication, modbus, rtu, sensor, weight, yr-3180, hx710b, arduino, ttl, rs-485
- [Magnetic angle sensors](#) 2026/03/05 21:19  
 magnetic angle sensor, magnetic flux, sensor, spi, i2c, pwm, communication, modul, as5047p, as5600, mt6701, mt6816, mt6835, tle5012b, amr, gmr, tmr, anisotropic magnetoresistive
- [NT18B07: 7 Kanal RS485 Temperatur Sensor with Modbus RTU](#) 2026/02/14 18:49  
 nt18b07, sensor, modbus, rtu, rs-485, communication, platine
- [PT100 / PT1000 sensors](#) 2026/04/23 21:52  
 rtd, pt100, pt1000, sensor, temperature
- [Radar Module RD-xx](#) 2026/04/23 21:52  
 radar, s3km1110, fmcw, rd-03, k-band, 24 ghz, sensor, distance, micro-movements

[HX711](#), [HX-711](#), [analog-to-digital](#), [ADC](#), [converter](#), [load cell](#), [Wheatstone bridge](#), [weight](#), [sensor](#), [communication](#), [arduino](#), [code](#)

This page has been accessed for: Today: 5, Until now: 8

From: <https://www.lamaplc.de/> - **lamaPLC**

Permanent link: <https://www.lamaplc.de/doku.php?id=sensor:hx711>

Last update: **2026/04/21 20:47**

